

Chatbox Single

Private canopy for one

When phone and video calls aren't meant for the entire office, this pod is a gift. Quiet, private, considerate.



1 person



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 30 minutes. Disassembly and reassembly are just as easy.



Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.



Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

Standard exterior colors



Black



White

Standard interior color



Dark gray

Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite




Storm Gray




Frozen Blue




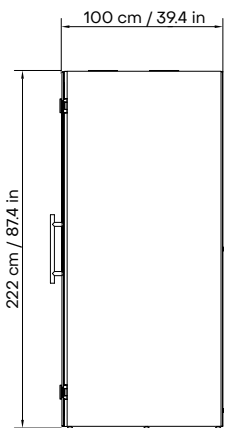



RIGHT VIEW

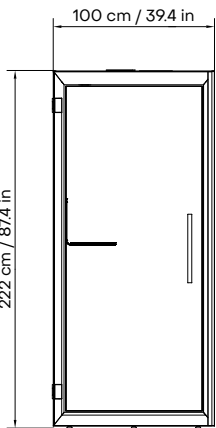


FRONT VIEW

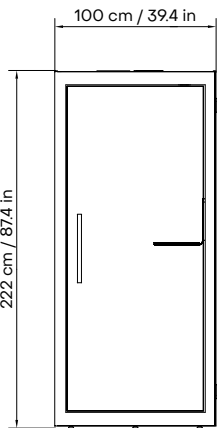

REAR VIEW

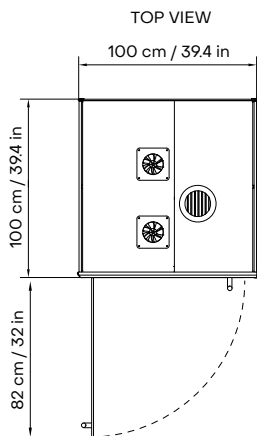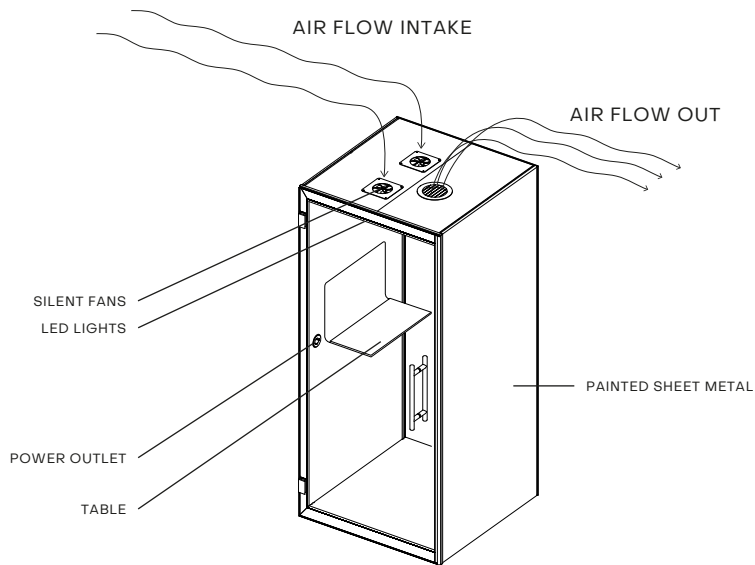

TOP VIEW

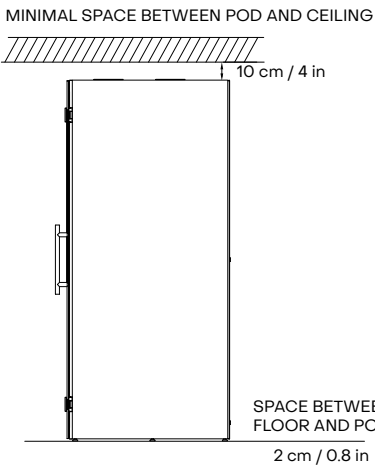

Chatbox Single technical specification

GENERAL PRODUCT INFO

Exterior size (W×D×H)	100 × 100 × 222 cm 39.4 × 39.4 × 87.4 in
Interior size (W×D×H)	87 × 98 × 204 cm 34.2 × 38.6 × 80.3 in
Weight (net)	300 kg / 661.4 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 3.4 W)
Air flow	air circulation speed is more than 22 l/s (79 m ³ /h) (47 ft ³ /min)
Lighting	energy-efficient LED light (6.7 W, 4,000 K, 900 lm)
Power outlets	Black socket with 110–240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth
Table	built-in table with antibacterial laminate finish, 680 × 300 × 132 mm / 28 × 12 × 5,2 in

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	27,3 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




Chatbox Single features



Retractable coat/bag hook



Air flow and lighting dimmer




Occupancy light

EXTRA FEATURE

Retractable coat/bag hook	A practical and nice-looking foldable hook for coat or bag
Air flow and lighting dimmer	
Occupancy light	
Whiteboard	Magnetic laminate surface, 595 × 750 mm / 28 × 30 in
Screen bracket	Universal bracket in accordance with VESA standard, for up to 24" screen (screen not included)
Seating	· Integrated stool with leg rest, height adjustable 560–820 mm / 22.4–32.3 in, seat fabric dark gray · HAY Revolver bar stool
Mobility kit	Set of detachable casters for moving booths. Can be used for all Chatbox models.

Options for surfaces

Exterior colors collection

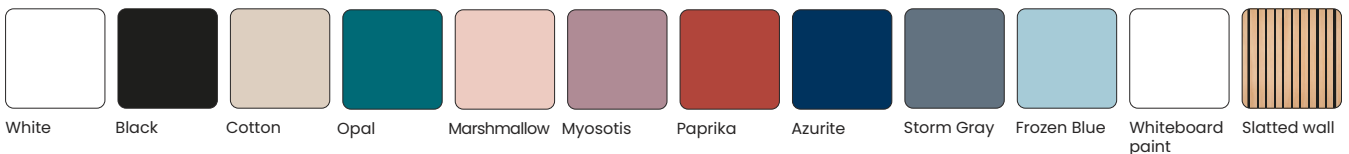

Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black



Chatbox Solo

Lush, stealthy solo flights

When a basic phone booth feels too cramped for serious work, Solo takes over. More room to focus for longer and keep outside distractions at bay.



1 person



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 40 minutes. Disassembly and reassembly are just as easy.



Endless customization

Swappable side skin and cover trim keeps your pod looking fresh and up to date (We call it Silen Dynamics.) Choose from different colors, covers, and customization options. All furniture can be easily removed and replaced.



Sustainable

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

Standard exterior colors



Black



White

Standard interior color



Dark gray

Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite







Storm Gray



Frozen Blue



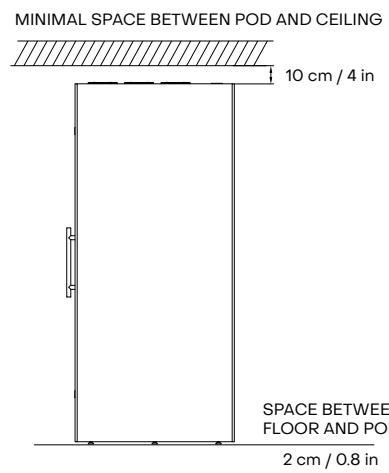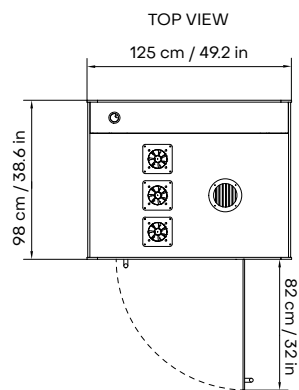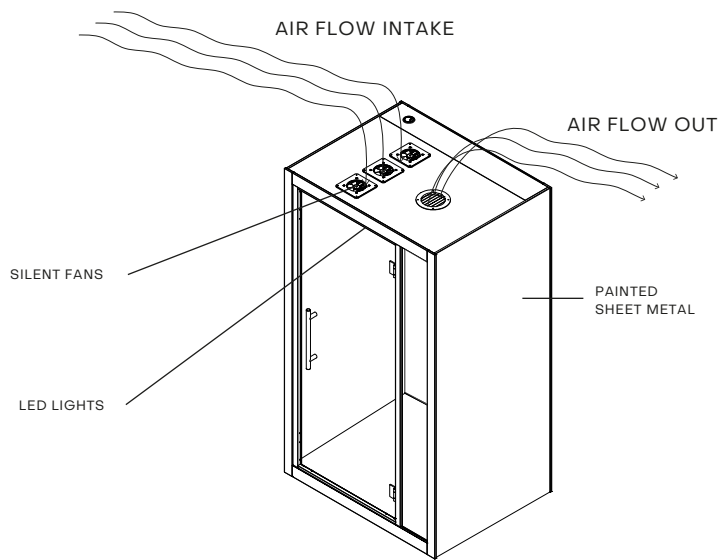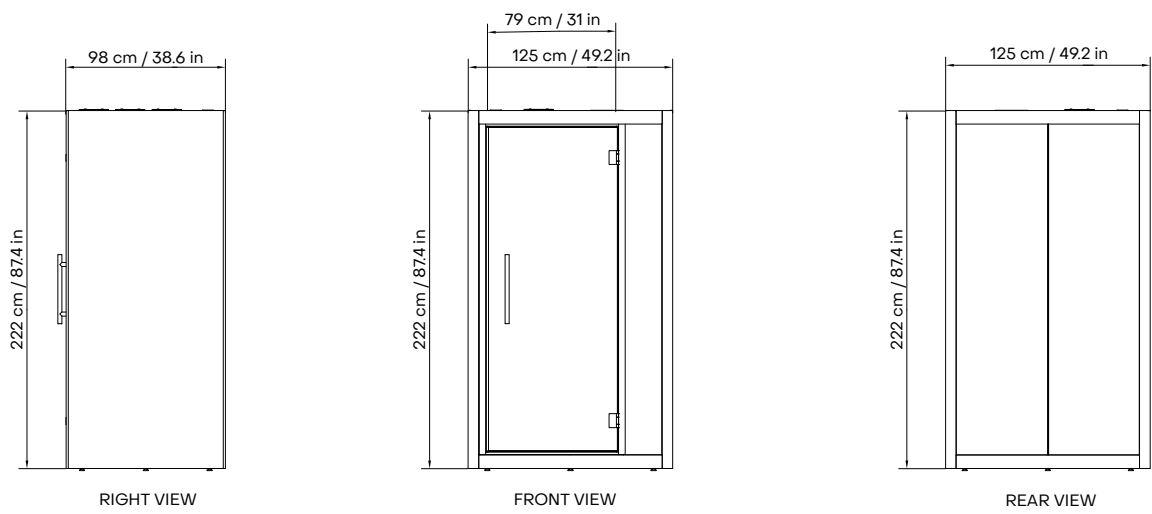

Chatbox Solo technical specification

GENERAL PRODUCT INFO

Exterior size (W*D*H)	125 × 98 × 222 cm 49.2 × 38.6 × 87.4 in
Interior size (W*D*H)	113 × 91 × 204 cm 44.5 × 35.8 × 80.3 in
Weight (net)	380 kg / 838 lb
Door handedness	right-handed door
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 55 l/s (198 m ³ /h) (117 ft ³ /min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	Black socket with 110–240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	27,8 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




Chatbox Solo features



Retractable coat/bag hook



Air flow and lighting dimmer



Occupancy light

EXTRA FEATURE

Retractable coat/bag hook A practical and nice-looking foldable hook for coat or bag


Air flow and lighting dimmer

Occupancy light

Mobility kit Set of detachable casters for moving booths.
Can be used for all Chatbox models.

Options for surfaces


Exterior colors collection



White




Black




Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite



Storm Gray



Frozen Blue

Whiteboard
paint

Slatted wall

Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black



Chatbox Duo

Nursery for nascent ideas

One-on-ones thrive here. A safe space for private conversations. A quiet bubble for chasing and sharing ideas.



1-2 people



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.



Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.



Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

Standard exterior colors



Black



White

Standard interior color



Dark gray

Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite







Storm Gray



Frozen Blue



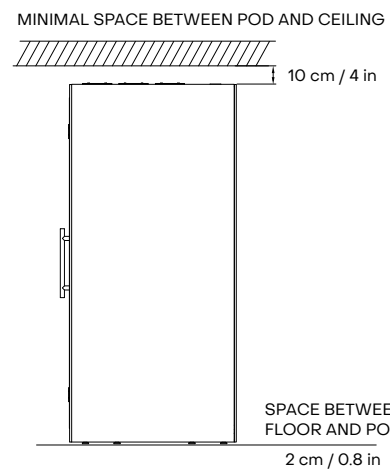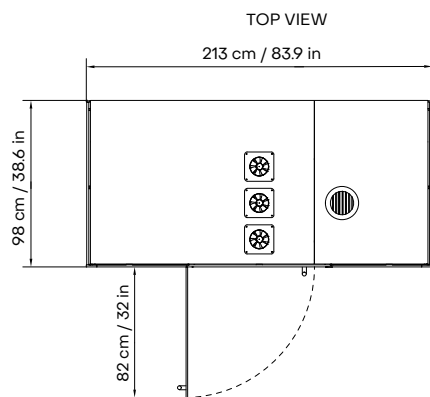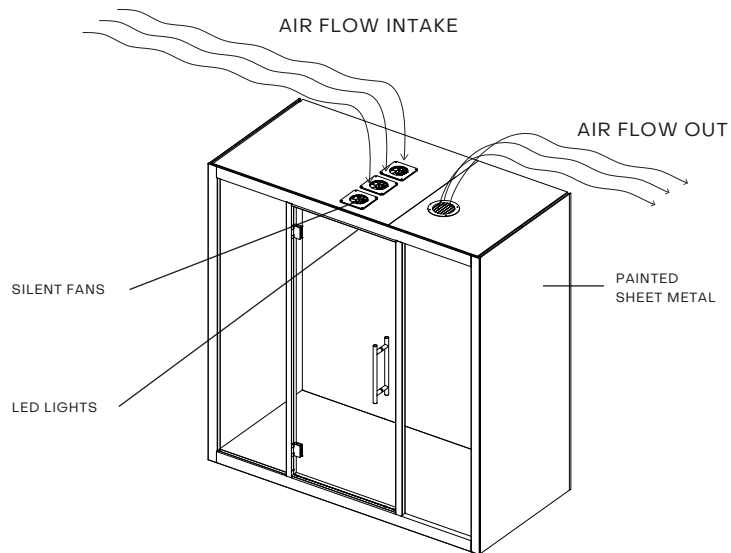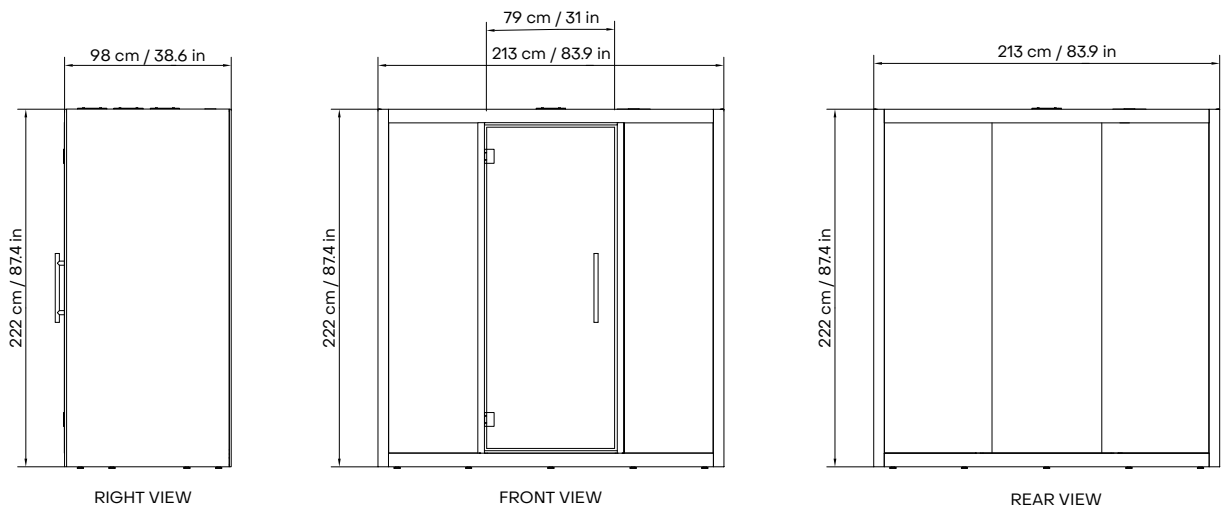

Chatbox Duo technical specification

GENERAL PRODUCT INFO

Exterior size (W*D*H)	213 × 98 × 222 cm 83.9 × 38.6 × 87.4 in
Interior size (W*D*H)	200 × 91 × 204 cm 78.7 × 35.8 × 80.3 in
Weight (net)	490 kg / 1080 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 55 l/s (198 m ³ /h) (117 ft ³ /min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	Option one: 2 x 110–240 V (10 A) Option two: 110–240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	29,4 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




Chatbox Duo features



Retractable coat/bag hook



Air flow and lighting dimmer



Occupancy light

EXTRA FEATURE

Retractable coat/bag hook A practical and nice-looking foldable hook for coat or bag


Air flow and lighting dimmer

Occupancy light

Mobility kit Set of detachable casters for moving booths.
Can be used for all Chatbox models.

Options for surfaces

Exterior colors collection

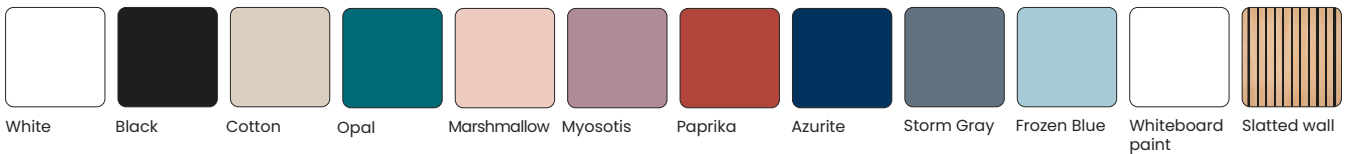

Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black



Chatbox Duo Plus

Camping makes perfect

An hour shared by four people is a luxury. Make it count, free of outside distractions – and without disturbing what's outside. Meet, focus, and create in peace and privacy.



1-4 people



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.



Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.



Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

Standard exterior colors



Black



White

Standard interior color



Dark gray

Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite







Storm Gray



Frozen Blue



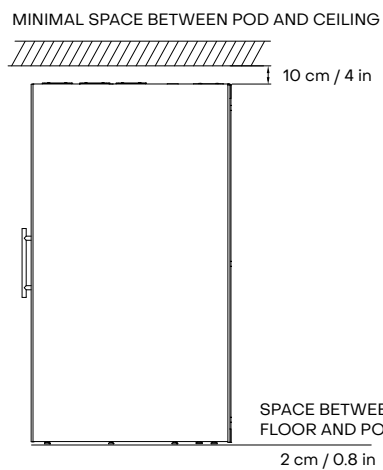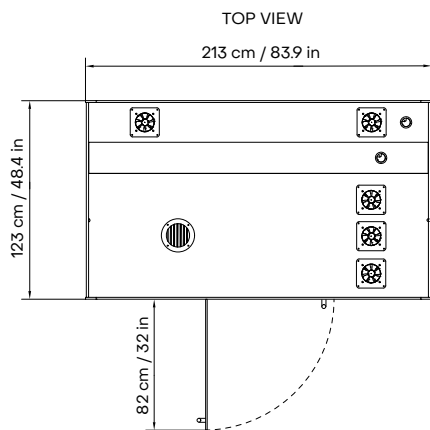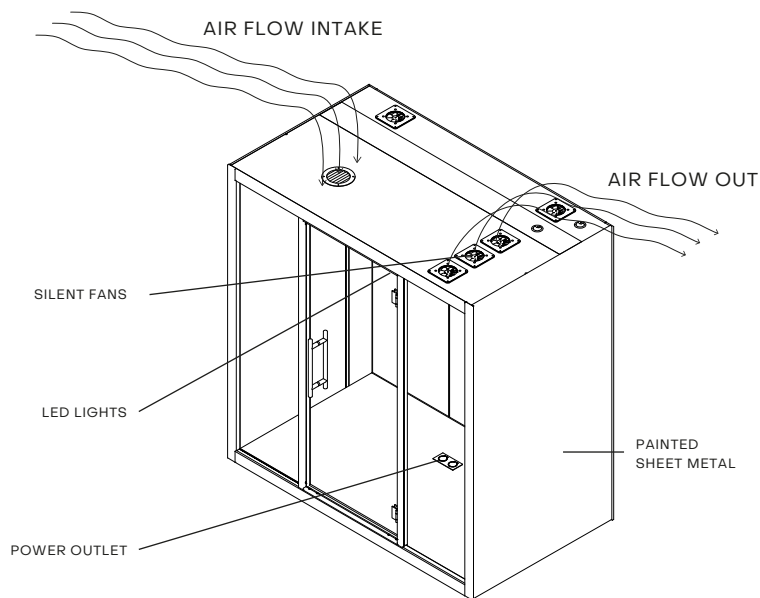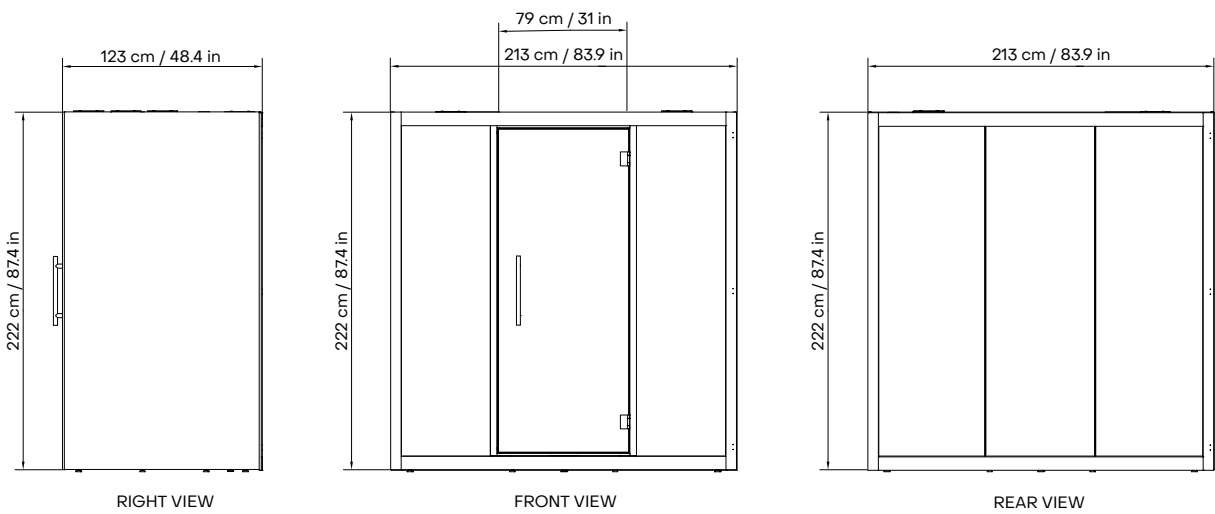

Chatbox Duo Plus technical specification

GENERAL PRODUCT INFO

Exterior size (W×D×H)	213 × 123 × 222 cm 83.9 × 48.4 × 87.4 in
Interior size (W×D×H)	200 × 116 × 204 cm 78.7 × 35.8 × 80.3 in
Weight (net)	580 kg / 1280 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 70 l/s (198 m³/h) (252 ft³/min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	Option one: 2 x 110–240 V (10 A) Option two: 110–240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	29,4 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




Chatbox Duo Plus features



Retractable coat/bag hook



Air flow and lighting dimmer



Occupancy light

EXTRA FEATURE

Retractable coat/bag hook	A practical and nice-looking foldable hook for coat or bag
Air flow and lighting dimmer	
Occupancy light	
Mobility kit	Set of detachable casters for moving booths. Can be used for all Chatbox models.

Options for surfaces

Exterior colors collection

White	Black	Cotton	Opal	Marshmallow	Myosotis	Paprika	Azurite	Storm Gray	Frozen Blue	Whiteboard paint	Slatted wall

Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black



Chatbox Quattro

Camping makes perfect

An hour shared by four people is a luxury. Make it count, free of outside distractions – and without disturbing what's outside. Meet, focus, and create in peace and privacy.



1-6 people



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 2.5 hours. Disassembly and reassembly are just as easy.



Endless customization

Thanks to its smart prefabricated design, it sets up in 2.5 hours. Disassembly and reassembly are just as easy.



Sustainable

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

Standard exterior colors



Black



White

Standard interior color



Dark gray

Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite








Storm Gray



Frozen Blue



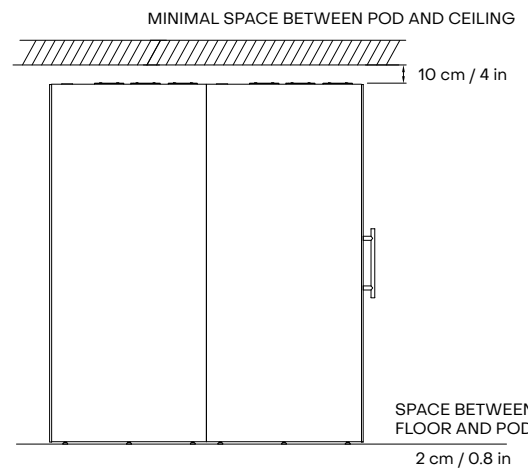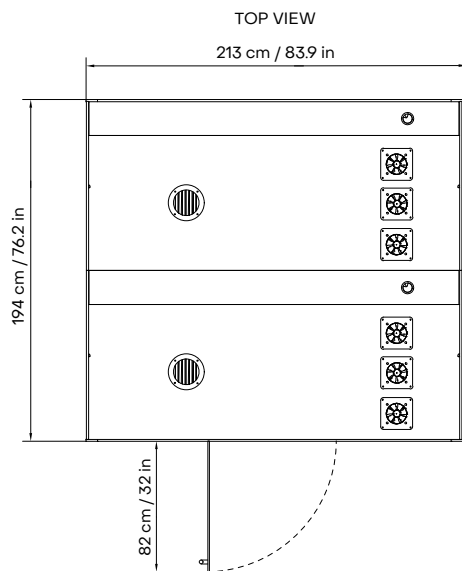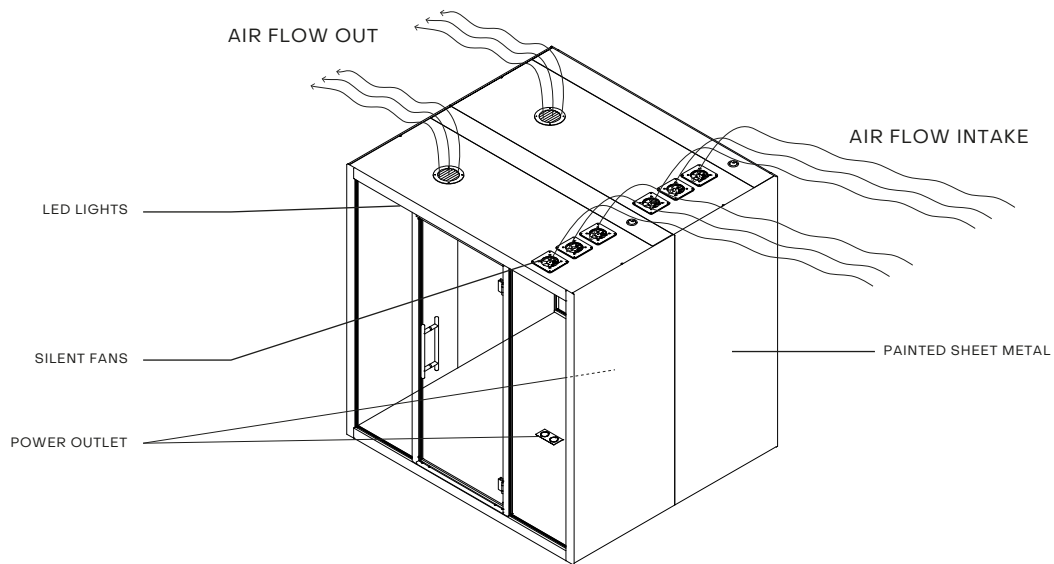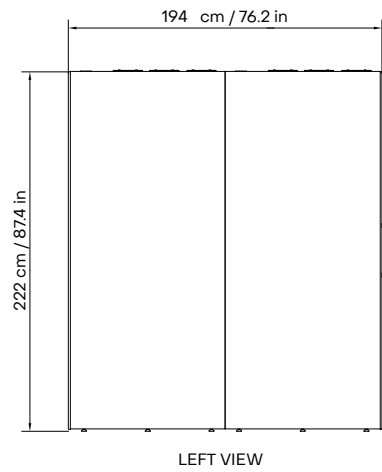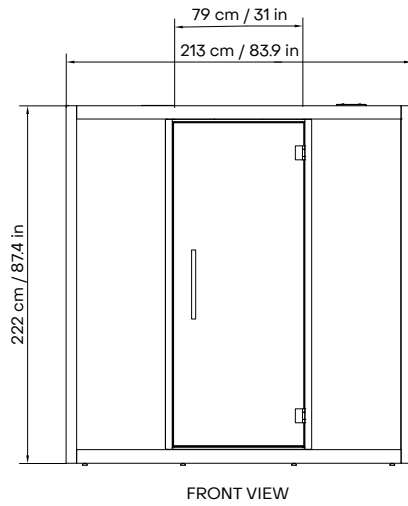

Chatbox Quattro technical specification

GENERAL PRODUCT INFO

Exterior size (W*D*H)	213 × 194 × 222 cm 83.9 × 76.2 × 87.4 in
Interior size (W*D*H)	200 × 186 × 204 cm 78.7 × 73.3 × 80.3 in
Weight (net)	980 kg / 2160 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 10,2 W)
Air flow	air circulation speed is more than 85 l/s (306 m ³ /h) (180 ft ³ /min)
Lighting	energy-efficient LED light (56 W, 4000 K, 4480 lm)
Power outlets	Option one: 4 x 110-240 V (10 A) Option two: 2 x 110-240 V (10 A) + 2 x USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	30,2 db (class A according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




Chatbox Quattro features



Retractable coat/bag hook



Air flow and lighting dimmer




Occupancy light

EXTRA FEATURE

Retractable coat/bag hook	A practical and nice-looking foldable hook for coat or bag
Air flow and lighting dimmer	
Occupancy light	
Whiteboard	Magnetic laminate surface
Screen bracket	Universal bracket in accordance with VESA standard, for up to 32" screen (screen not included)
Booking bracket	Bracket for a tablet (tablet and booking system not included)
VC ready	Readiness for video conferencing system (includes only necessary ports and brackets)
VC system	Video conferencing system with screen bracket (excl. screen)
Mobility kit	Set of detachable casters for moving booths. Can be used for all Chatbox models.

Options for surfaces

Exterior colors collection

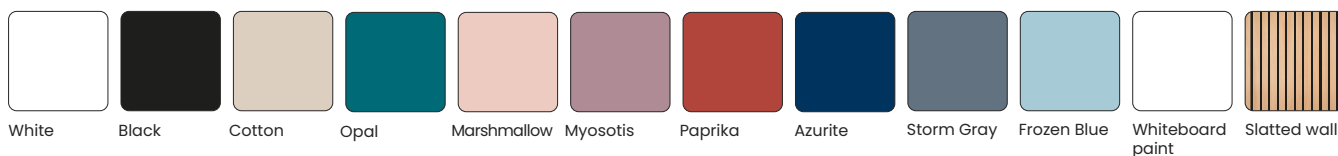

Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black

